



HAPPY-TRAIL.COM
Dual Sport & Adventure Touring Specialists


Thank you for purchasing Happy Trails products. Our products are proudly hand made in Boise Idaho, USA. If you have any questions or concerns about the installation of this product, please contact us directly at 1-800-444-8770 or e-mail installation@happy-trail.com.

Before you begin, place the bike on a hard level surface where you have room to work. Lay out the parts included in this kit and compare to the parts list at the bottom of these instructions. If any parts or hardware are missing, contact us immediately at the number or email listed above.

Step 1

Place (4) 1/2" x 5/8" x 0.319" aluminum spacers in the holes in the OEM tail rack. See Fig 1.


Fig 1

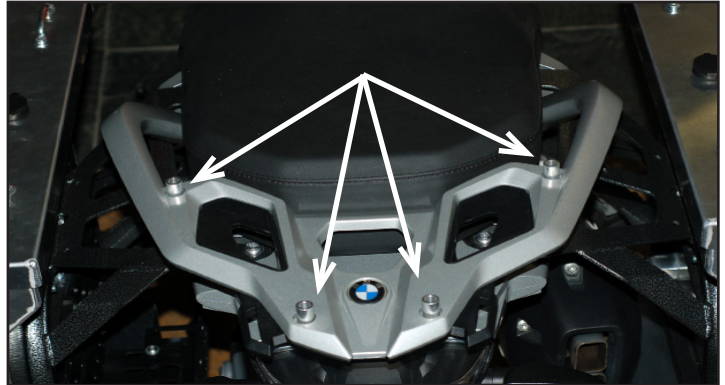

Step 2

Place the Tail Plate on top of the spacers and attach using (4) M6x40 BHCS bolts, lock washers, and flat washers. Tighten to 9 ft/lbs. See Fig 2.

Fig 2

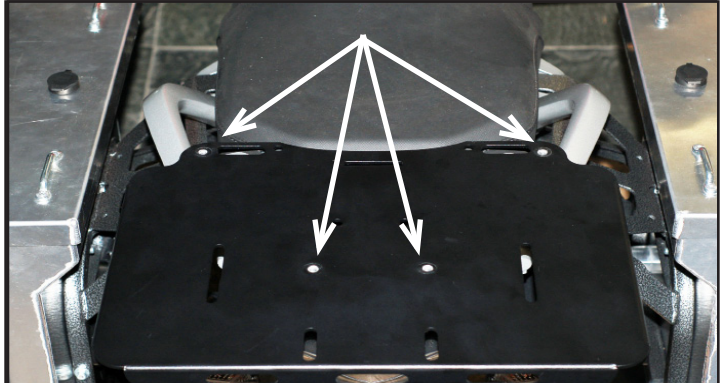

Recommended Tools:

4mm Allen (hex) wrench



Hardware and Bolt list:

- (1) T-3 Top Plate, Predrilled
- (4) M6x40 BHCS bolts
- (4) M6 lock washers
- (4) M6 flat washers
- (4) 1/2"OD x 5/8"L x 0.319"ID aluminum spacers