



HAPPY-TRAIL.COM


Thank you for purchasing Happy Trails products. Our products are proudly hand made in Boise Idaho, USA. If you have any questions or concerns about the installation of this product, please contact us directly at 1-800-444-8770 or e-mail installation@happy-trail.com.

Before you begin, place the bike on a hard level surface where you have room to work. Lay out the parts included in this kit and compare to the parts list of these instructions. If any parts or hardware are missing, contact us immediately at the number listed above.

When installing HT guards and racks, **leave all bolts loose until entire rack is fitted.**

This allows the rack to move and take up differences in frame construction.

We also recommend that removable strength thread locking compound be used on all threaded connections.

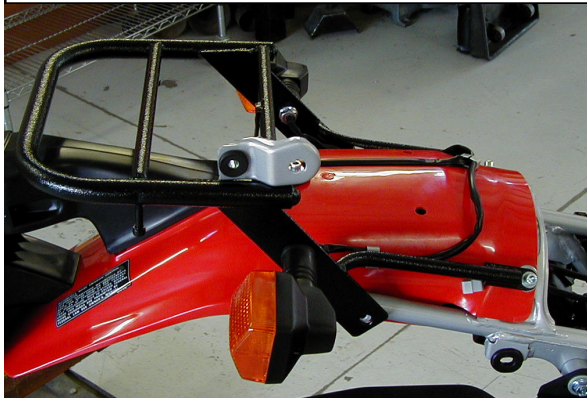

Installation:

Remove the side panels and seat. Remove turn signals taking care not to damage wires.

Mount the tail rack starting with the front mounts. Use an M6x20 Button head bolt with a flat washer, through the tail rack mounting tab, then a 1/4 Fender washer between the rack and the fender. Finish it up with another flat washer and a Nylock nut under the frame.

Use an M6x20 Button Head bolt at the rear fender mount with 2 flat washers, top and bottom, and a Nylock nut.

Mount the side mounts using the M6x50 SH Bolts.

Relocate the turn signals to the holes supplied in the tail rack using the stock nut for the turn signal stock. Reconnect the wires.

Reinstall the side panels and seat.



Bolt List:

- | | |
|---|--------------------|
| 3 | M6x20 BH Bolts |
| 2 | M6x50 SH Bolts |
| 6 | 1/4 Flat Washers |
| 2 | 1/4 Fender Washers |

Rev. 1
May 29, 2009
J4
HTP3-6-6B-20