

HTP7-3-51 DRZ400 RADIATOR GUARD FOR IMS TANKS



Thank you for purchasing Happy Trails products. Our products are proudly hand made in Boise Idaho, USA. If you have any questions or concerns about the installation of this product, please contact us directly at 1-800-444-8770 or e-mail installation@happy-trail.com.

Before you begin, place the bike on a hard level surface where you have room to work. Lay out the parts included in this kit and compare to the parts list on the final of these instructions. If any parts or hardware are missing, contact us immediately at the number or email listed above.

Step 1

It is not necessary to remove the tank for installation of the radiator guards although the process is somewhat simpler to do so.

Remove the plastic radiator shroud from in front of the radiator as shown in Fig 1.

Remove the two radiator bolts shown by the arrows in Fig 1.

Step 2

Place the stock radiator guards through the holes in the radiator guards as shown in Fig 2. Place a 1/4"x1/2" flatwasher on the bolt after inserting it through the engine guard.

Step 3

Install the radiator guard along with the bolts and washers through the radiator mounting holes in the frame.

Fig1

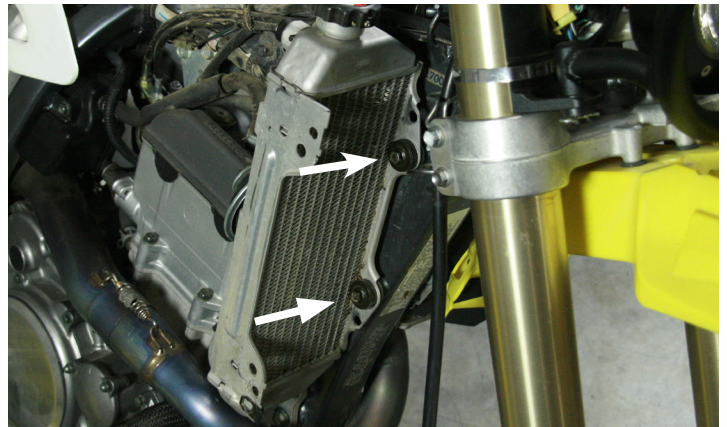


Fig 2




Fig 3



Step 4

Tighten both bolts down to 9ft/lbs. Removable strength thread locking compound should be used on the bolts to prevent them from loosening.


Fig 4

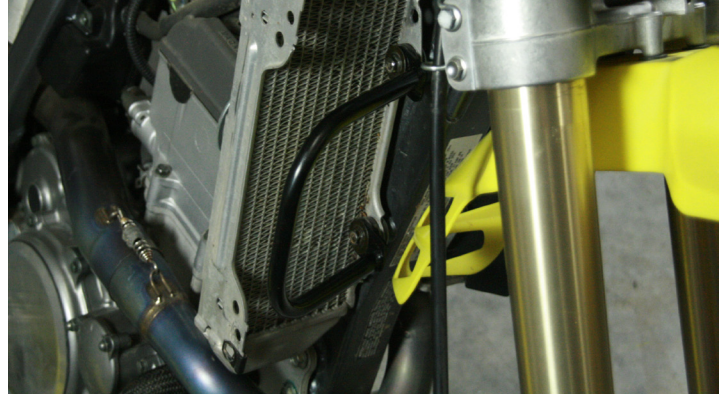

Step 5

Re-install the factory plastic radiator covers as shown in Fig 5.

Fig 5

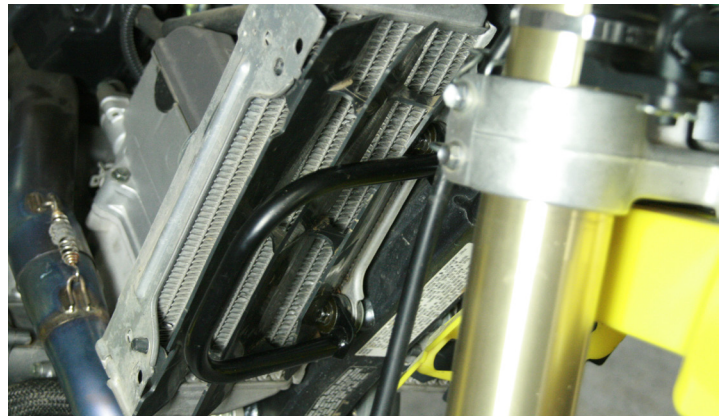

Recommended Tools:

- 10mm wrench or socket
- Removable strength thread locking compound



Hardware List:

- 2 Radiator guards
- 4 1/4"x1/2" flatwashers



Happy Trails Products

4/17/12
Rev. 1
HH